

stanok

via Liguria 34/18 - 20068 Peschiera Borromeo (Mi) - Italy
telefono +39 02.55.30.58.59 - fax +39 02.51.68.71.39
www.stanok.it - info@stanok.it



PULSAR

Cushions pressed in PE hoses are sealed using this device and the excess film is simultaneously cut away.

The filled bag is manually inserted between the rails by the operator. The product is held in the left hand and the excess bag is held in the right hand.


The sealing process is triggered when feeding the packed cushion against the back pushbutton with the back of the hand or via foot control.

Applications:

- Contract packaging
- Textile industry
- other applications in which a large numbers of items per minute are required.



TECHNICAL DATA

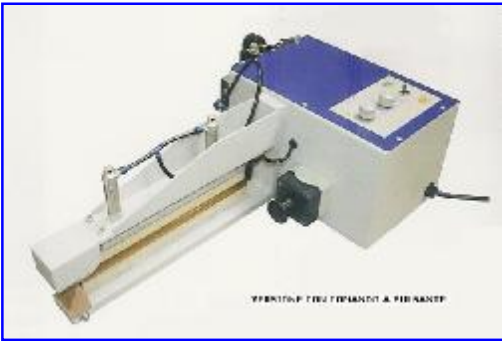

PULSAR 200

| | |
|--------------------------|----------------------------|
| Sealing length (mm) | 200 |
| Sealing width (mm) | Diam. 1 |
| Sealing bar opening (mm) | 10 |
| Max sealing output (mm) | 2x0,10 PE |
| Number of cycles | 12 per minute |
| Actuation | Foot control or pushbutton |
| Power | 230V/50 Hz |
| Degree of protection | IP 20 |
| Weight | Kg. 10,5 |
| Dimension (mm) | 420x500x200h |



PULSAR 300

| | |
|--------------------------|----------------------------|
| Sealing length (mm) | 300 |
| Sealing width (mm) | Diam. 1 |
| Sealing bar opening (mm) | 10 |
| Max sealing output (mm) | 2x0,10 PE |
| Number of cycles | 12 per minute. |
| Actuation | Foot control or pushbutton |
| Power | 230V/50 Hz |
| Degree of protection | IP 20 |
| Weight | Kg. 11,5 |
| Dimension (mm) | 420x600x200h |

PULSAR 400

| | |
|--------------------------|----------------------------|
| Sealing length (mm) | 400 |
| Sealing width (mm) | Diam. 1 |
| Sealing bar opening (mm) | 10 |
| Max sealing output (mm) | 2x0,10 PE |
| Number of cycles | 12 per minute. |
| Actuation | Foot control or pushbutton |
| Power | 230V/50 Hz |
| Degree of protection | IP 20 |
| Weight | Kg. 13 |
| Dimension (mm) | 420x700x200h |



Technical alteration without prior notice.